

# LAVALIER

## MICROPHONE



### Introducing the RØDE LAVALIER microphone

Whether you're presenting for television or live on-stage; in a 20,000 seat auditorium or in a house of worship, RØDE has all your audio requirements covered with the reliable and discreet Lavalier microphone.

Featuring the pure, clear audio and low handling noise that RØDE is celebrated for, the Lavalier is built to deliver and to last.

The included water resistant pop filter and mini-furry for high wind protection ensure quality recordings in adverse environments, while the anti-trauma water resistant case provides rugged and secure protection for the microphone, cables and accessories.

Knowing that versatility is paramount in any product, RØDE has developed the MiCon™ connector system which provides seamless integration between all of RØDE's compact wearable microphones and a wide range of wireless systems.



# LAVALIER

## MICROPHONE

### ERGONOMIC DESIGN

- Ultra discreet appearance
- Incorporated cable management system

### HIGH QUALITY PERFORMANCE

- Ø4.5 mm miniature microphone
- Corrosion resistant stainless steel
- Low handling noise

### UNIVERSAL COMPATIBILITY

- RØDE MiCon™ interconnectivity system provides interface with a wide range of wireless systems while maintaining discreet and unobtrusive appearance
- Gold plated connections

### ACCESSORIES

- Anti-trauma water resistant storage case
- Water resistant pop filter
- Mini-furry for high wind protection
- Shielded, detachable Kevlar® reinforced cable
- Lapel-style cable management clip
- Adjustment tools
- Sanitary cleansing wipes





Compact, interchangeable MiCon™ adaptors available to suit industry standard wireless systems\*

### SPECIFICATIONS

Acoustic Principle	Permanently Polarised Condenser
Active Electronics	JFET
Polar Pattern	Omni-directional
Frequency Range	60 Hz ~ 18 KHz
Output Impedance	3k Ω Typical
Signal To Noise Ratio	69 dB
Equivalent Noise	25 dB Typical
Clipping SPL	110 dB
Maximum Output	189 mV**
Sensitivity	-33.5 dB re 1 V/Pa (21 mV @ 94 dB SPL) ± 3 dB @ 1 kHz
Dynamic Range	85 dB Typical**
Power Requirements	Min 2 V ~Max 5 V through RØDE wireless adaptors P48 through RØDE XLR adaptor
Output Connection	RØDE Micon™ connector
Weight	Microphone without cable or clip: 1 g (0.035 ounce) Microphone and clip, without cable: 5 g (0.176 ounce)
Packed Weight (excluding shipper)	Including hard carry case - 215 g (7.584 ounce)
Dimensions	Excluding packaging - Ø4.50 mm (wide) × 12 mm In clip: 12 mm (wide) × 28 mm × 22 mm (high)

\*\* Calculated from maximum SPL peak before clipping

All measurements are calculated when powered at 5 V or P48 (RØDE XLR adaptor)

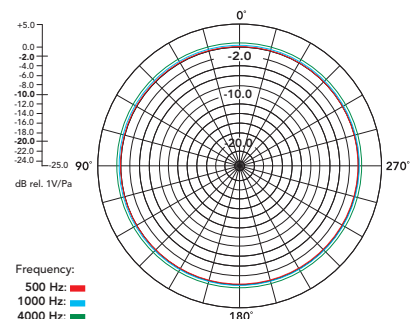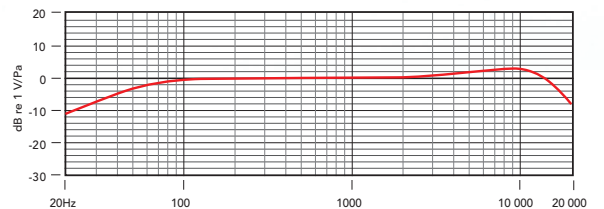

\*MiCon™ adaptors sold separately - see [rodemic.com/lapel-1](http://rodemic.com/lapel-1) for a full list of compatibility